



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : D21H 25/12, D21G 3/00 // B05C 11/02	A1	(11) International Publication Number: WO 00/58555 (43) International Publication Date: 5 October 2000 (05.10.00)
(21) International Application Number: PCT/FI00/00241 (22) International Filing Date: 23 March 2000 (23.03.00) (30) Priority Data: 990684 26 March 1999 (26.03.99) FI (71) Applicant (for all designated States except US): VALMET CORPORATION [FI/FI]; Fabianinkatu 9 A, FIN-00130 Helsinki (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): PARNI, Petri [FI/FI]; Kyrölänkatu 5 B 15, FIN-15200 Lahti (FI). TAKKINEN, Atte [FI/FI]; Kaarnapolku 4 A 13, FIN-04440 Järvenpää (FI). (74) Agent: SEPPO LAINE OY; Itämerenkatu 3 B, FIN-00180 Helsinki (FI).		(81) Designated States: AE, AG, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, DZ, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>In English translation (filed in Finnish).</i>
(54) Title: COATED HOLDER AND ROD IN A ROD-TYPE WEB COATING APPARATUS (57) Abstract The invention relates to a rod doctor intended for metering the amount of coating mix applied to the surface of a moving web (5) of board or paper or to the applicator roll surface in a film-transfer coater and for leveling the applied coat, the rod doctor comprising a support frame element (2), a cradle (3) adapted into the support frame element (2), and a rod adapted to rotate in the cradle (3). The surfaces of the cradle (3) on which the rod (1) is adapted to rotate conformingly are coated by a surfacing layer (6) serving to improve the wear resistance and sliding friction properties of said surfaces.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

COATED HOLDER AND ROD IN A ROD-TYPE WEB COATING APPARATUS

The present invention relates to a rod doctor according
5 to the preamble of claim 1.

In coating a web of paper or board, the coating mix is
first applied to the surface of a moving web, whereupon
the excess coating is removed from the surface of the web
10 and the coating layer is smoothed. Finally, the excess
moisture content of the coating is removed in dryers. In
blade application, a doctor blade is used for metering
the applied amount of coat and smoothing the surface of
the applied coating. Also a rod doctor, an air doctor or
15 different kinds of rolls or scrapers can be used in the
metering of the coating mix.

In most cases, the doctor blade of a blade coater can be
replaced by a doctor rod. The rod doctor comprises a
20 framework, which extends over the cross-machine width of
the paper/boardmaking machine and has connected thereto a
flexible loading hose, and a cradle into which the doctor
rod is rotatably mounted. The rod is rotated in the
cradle by means of a drive mechanism generally in a
25 reverse direction to the travel direction of the moving
web. Typically, the cradle is fabricated from a polymeric
material, but may also be made from metal materials, for
instance. Also the doctor rod may be made from a
polymeric or metal material.

30

A problem generally occurring in conventional rod doctor
constructions is vibration of the rod that makes the

applied coat layer uneven after leveling. Such vibration also causes clearly detectable pulsation in the running of the rod drive motors. A plausible cause of the vibration is the high friction between the cradle and the rod rotating therein. The amplitude of the vibration has also been found to increase as the paper/boardmaking machines become wider. To reduce the friction, the gap between the cradle and the rod can be filled with water that acts as a lubricant. However, the lubricating water may leak from the cradle into the coating mix thus diluting the coating and deteriorating the quality of the applied coat.

Another problem typically handicapping rod doctor assemblies is a rapid wear of the rod and its support cradle that also causes unevenness on the applied coat. Cradles made from urethane polymers have been found particularly prone to a fast wear. Attempts have been made to slow down the wear rate by means different ways, e.g., by coating the rod with a chromium, a glass/carbon-fiber or ceramic surface coatings, but these measures only serve to improve the wear resistance of the rod without exhibiting any essential reduction of the friction between the rod and the cradle.

It is an object of the present invention to overcome the drawbacks of the above-described prior art techniques and to provide an entirely novel type of rod doctor.

The goal of the invention is achieved by way of surfacing at least the cradle of the rod doctor by a thin surface coating layer. When necessary, a surface coating may also

be made on the rod that supportedly rotates in the cradle. The surface coating used herein is selected from a group of hard materials having good sliding and self-lubricating properties, whereby the coefficient of friction between the cradle and the rod rotating therein is reduced. By the same token, the vibration of the doctor is reduced and the wear of the rotating rod and its cradle is lessened. The coating layer may be fabricated using, e.g., so-called vacuum deposition techniques, one of which is physical vapor deposition.

More specifically, the leveling rod according to the invention is characterized by what is stated in the characterizing part of claim 1.

The invention offers significant benefits.

By virtue of the approach according to the invention, the sliding conditions between the rod and the cradle are improved, whereby the rod vibration and the problems associated therewith are reduced or even eliminated entirely. Due to the improved sliding properties, the drive mechanisms of a lower power rating than those of the prior art may be used for rotating the rod. The wear rate of the rod and its cradle is reduced resulting in less frequent need for leveling rod unit maintenance and giving a longer life. The rod can be rotated in its cradle without necessarily needing any lubricating water, whereby the web coating problems caused by water leakage are eliminated. Simultaneously, also the construction of the leveling rod unit is simplified, because no connections or other specific means for the lubrication water

circulation are required. The surface coating also serves to improve the corrosion resistance of the cradle and the rod.

5 In the following, the invention will be examined in greater detail by making reference to the appended drawings in which

Figure 1 shows a first embodiment of a rod doctor
10 according to the invention having its cradle surfaced;
and

Figure 2 shows another embodiment of a rod doctor
according to the invention having both the cradle and the
15 rod surfaced.

The leveling rod unit shown in figure 1 comprises support
frame elements 2, 8 extending over the entire width of
the paper/boardmaking machine and having a flexible
20 loading hose 4 mounted therebetween. Into the support
frame element 2 is adapted a cradle 3 having a rod 1
adapted to supportedly rotate therein. The rod 1 is
rotated by means of a drive mechanism, typically reverse
to the travel direction of a web 5 being coated. The rod
25 1 is pressed by means of the loading hose 4 against the
web 5 being coated, whereby the excess coating mix
applied to the surface of the web 5 is removed and the
applied coating layer is smoothed.

30 The cradle 3 is covered by a surfacing layer 6 with a
thickness typically varying from a few nanometers to a
few tens of micrometers. Advantageously, the layer 6 is

selected from the group of hard materials exhibiting good sliding and self-lubricating properties.

As shown in figure 2, both the leveling rod cradle 3 and the rod 1 rotatably mounted therein are provided with a surfacing layer 6, 7. The surfacing layer 7 serves to improve the wear resistance of the rod 1 and to reduce the coefficient of friction between the cradle 3 and the rod 1. The surfacing layer 7 of the rod 1 may be of the same material as that of the surfacing layer 6 of the cradle 3. Normally, the surfacing layers 6, 7 are made from different materials, whereby the seizing tendency and wear rate of the sliding surfaces are generally reduced.

The surfacing layers 6, 7 may be formed by means of, e.g., vacuum deposition techniques. One such vacuum deposition method is the so-called physical vapor deposition (PVD), wherein the deposition process is carried out under a vacuum or in a low-pressure chamber into which the gas-phase coating material is introduced. Conventionally, the coating material is vaporized by means of an electron beam or resistive heating. Transported in the gas phase, the coating material adheres to the surface of the object being surfaced. When required, the coating process can be performed at an elevated temperature of about 400-500 °C.

A surfacing layer fabricated by vacuum deposition techniques is comparatively thin; its thickness typically varies from 1 nm to 90 μm. In spite of its infinitesimal thickness, the surfacing layer is entirely free from

pores and conforms without cracks to the contour of the object being coated as the layer is produced at an atomic layer deposition level. The substrate to be surfaced by vacuum deposition can be of almost any material such as a metal, stone, plastic or glass. The surfacing materials used herein are selected from the groups of metals, metal alloys, oxides, nitrides or carbides. Different kinds of surface coatings may vary vastly in terms of their properties.

10

The surfacing layers 6, 7 of the cradle 3 and the rod 1 may be, e.g., a silicon molybdenum alloy in which silicon makes the surfacing layer 6, 7 hard, while molybdenum gives the favorable self-lubricating and sliding properties. Another advantageous alternative as a surface coating is a vacuum-deposited layer of diamond (DLC, Diamond Layer Coating) having a hardness typically in the range of 6,000 - 10,000 HV. This coating is highly resistant to acids and bases. Furthermore, a diamond coating gives a very low coefficient of friction against most other materials. For instance, the coefficient of friction between steel and a diamond coating is typically 0.1 in a sliding contact of dry surfaces that is only one-fifth of the coefficient of friction between two sliding steel surfaces under similar conditions. Other advantageous surfacing layer materials in an embodiment according to the invention are chromium and chromium-teflon composition.

15

20

25

30

In addition to those described above, the invention may have alternative embodiments.

The technique used for applying the surface coating may be selected rather freely. Instead of using vacuum deposition, the coating process may be performed using, e.g., thermal spraying in which the coating material is molten into a hot plasma that is directed to impinge on the surface of the object to be coated. In thermal spraying, the coating materials are generally metals and plastics such as chromium, molybdenum or teflon. As the number of suitable materials for the surfacing layers 6, 7 of the cradle 3 and the rod 1 is vast, the coating material must be selected according to the requirements set by the intended application and other similar factors. The rod doctor according to the invention may be used for metering the amount of coating mix applied to the applicator roll surface in a film-transfer coater and for leveling the applied coat.

Claims:

1. Rod doctor intended for metering the amount of coating mix applied to the surface of a moving web (5) of board or paper or to the applicator roll surface in a film-transfer coater and for leveling the applied coat, the rod doctor comprising

- a support frame element (2),
- a cradle (3) adapted into the support frame element (2), and
- a rod (1) adapted to rotate in the cradle (3),

characterized in that the surfaces of the cradle (3) on which the rod (1) is adapted to conformingly rotate are covered by a surfacing layer (6) serving to improve the wear resistance and sliding friction properties of said surfaces.

2. Rod doctor according to claim 1, characterized in that the rod (1) is covered by a surfacing layer (7) serving to improve the wear resistance and sliding friction properties of the rod.

3. Rod doctor according to claim 1 or 2, characterized in that the thickness of the surfacing layer (6, 7) is from 1 nm to 90 μ m.

4. Rod doctor according to any one of claims 1 - 3, characterized in that the surfacing layer

(6, 7) is of a silicon-molybdenum alloy.

5 5. Rod doctor according to any one of claims 1 - 3,
c h a r a c t e r i z e d in that the material of the
surfacing layer (6, 7) is of diamond.

10 6. Rod doctor according to any one of claims 1 - 3,
c h a r a c t e r i z e d in that the surfacing layer
(6, 7) is of chromium.

7. Rod doctor according to any one of claims 1 - 3,
c h a r a c t e r i z e d in that the surfacing layer
(6, 7) is of a chromium-teflon composition.

15 8. Rod doctor according to any one of foregoing claims,
c h a r a c t e r i z e d in that the surfacing layer
(6, 7) is made using a vacuum deposition technique.

20 9. Rod doctor according to any one of claims 1 - 4,
c h a r a c t e r i z e d in that the surfacing layer
(6, 7) is made using a thermal spraying technique.

1/1

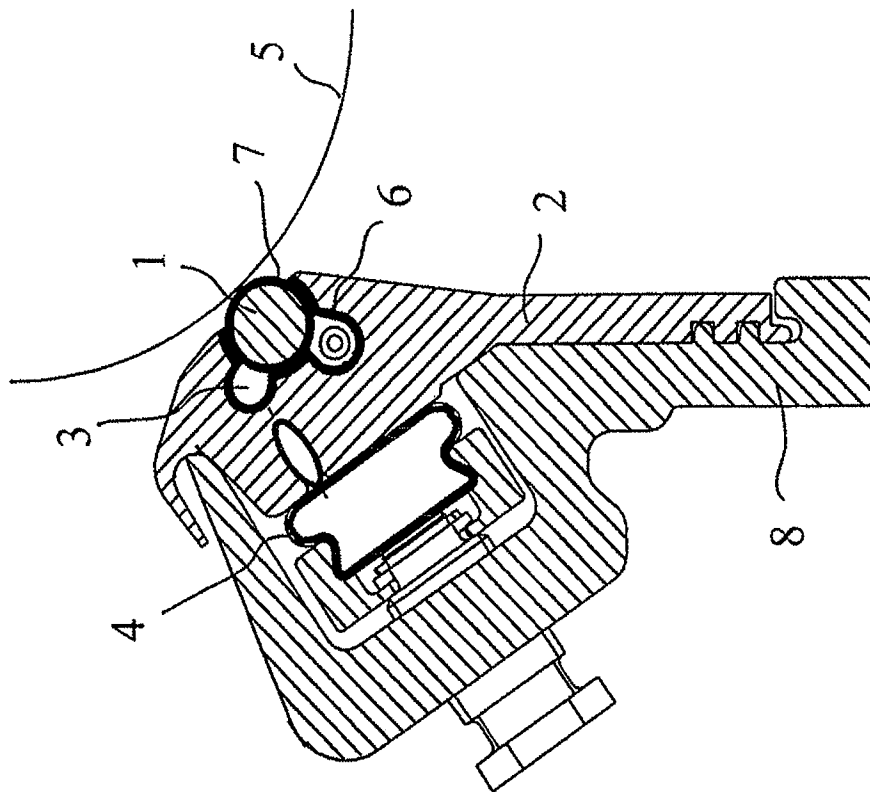


Fig. 1

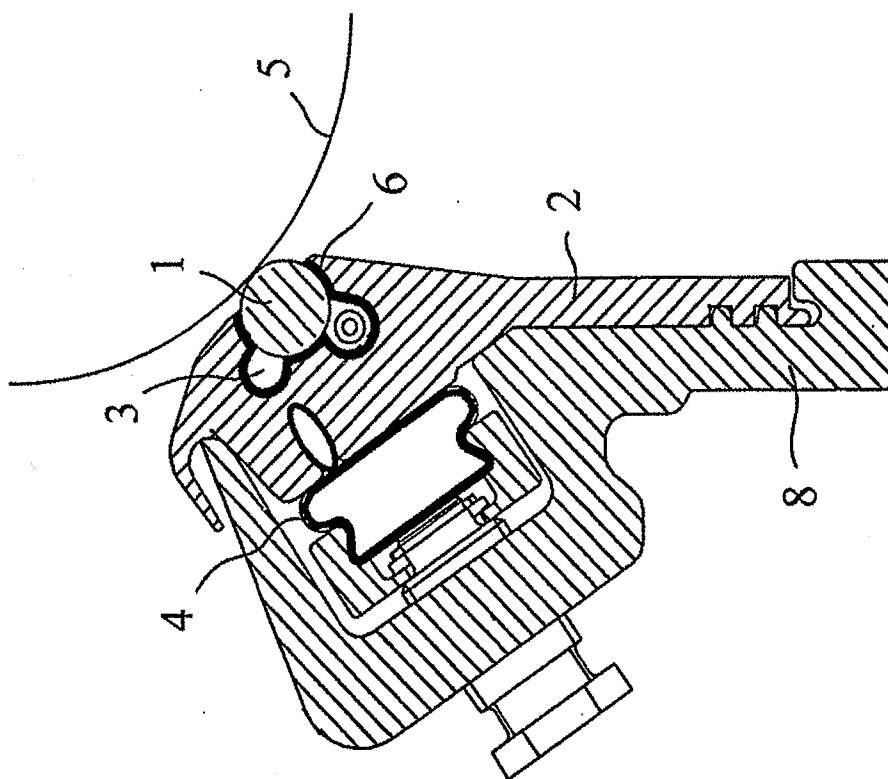


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/00241

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: D21H 25/12, D21G 3/00 // B05C 11/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: D21G, D21H, B41F, B05C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, PAJ, EPO

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4245582 A (ALHEID ET AL.), 20 January 1981 (20.01.81), column 2, line 52 - line 59; column 6, line 65 - column 7, line 19, figure 1, claim 1, abstract	1
Y	column 2, line 52 - line 59; column 6, line 65 - column 7, line 19, figure 1, claim 1, abstract	2,3,8
	--	
X	SE 377056 B (FELDMÜHLE ANLAGEN- UND PRODUKTIONS GMBH), 23 June 1975 (23.06.75), page 5, line 15 - line 36, claims 1,5	1
	--	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 June 2000

Date of mailing of the international search report

20-07-2000

Name and mailing address of the ISA:

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Authorized officer

MATTTAS ARVIDSSON/TDM

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/00241

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5264247 A (LINTULA), 23 November 1993 (23.11.93), column 2, line 11 - line 53, figure 1, claims 1,11 --	2,3,8
A	GB 1281931 B (BELOIT CORPORATION), 19 July 1972 (19.07.72), page 2, line 97 - line 105, claims 1-6 --	1-9
A	DE 19626580 A1 (JAGENBERG PAPIERTECHNIK GMBH), 8 January 1998 (08.01.98), figures 1-3, claims 1-5, abstract -----	1-9

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/12/99

International application No.

PCT/FI 00/00241

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4245582 A	20/01/81	CA 1125003 A ES 488198 A GB 2040738 A,B IN 152703 A IT 1129792 B IT 8019445 D MX 149644 A PH 16390 A	08/06/82 16/02/81 03/09/80 17/03/84 11/06/86 00/00/00 07/12/83 20/09/83
SE 377056 B	23/06/75	AT 310547 A,B CH 536899 A DE 2007067 A,B FR 2078663 A JP 59049064 B NL 7102072 A US 3701335 A DE 2034004 A,B,C GB 1347107 A DE 2105704 A,B,C	15/08/73 29/06/73 09/09/71 05/11/71 30/11/84 19/08/71 31/10/72 20/01/72 27/02/74 14/09/72
US 5264247 A	23/11/93	FI 904541 A US 5595601 A AU 6482396 A EP 0837901 A WO 9701599 A	15/03/92 21/01/97 30/01/97 29/04/98 16/01/97
GB 1281931 B	19/07/72	BR 6915273 D DE 1962910 A ES 374699 A FI 50158 B,C FR 2026399 A SE 364089 B	00/00/00 09/07/70 16/01/72 01/09/75 18/10/70 11/02/74
DE 19626580 A1	08/01/98	NONE	